



DECORATIVE CEILING TILES
from plain to beautiful in hours




Installation Guide for Wood Slat Walls



Installation Guide for Wood Slat Walls


Step 1: Preparation for work with Plywood / Drywall

Before starting the construction process, it is advisable to prepare the base by using plywood or MDF. Remove any existing wallpaper or film from the surface to ensure a clean foundation.

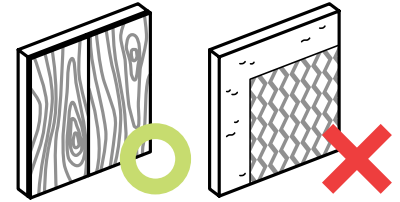


Step 2: Hot Melt Application

Apply generous amount of a "construction grade" Adhesive (Gorilla Glue / Loctite) using a Glue gun. Addition of Silicon is recommended for humid conditions. This step helps in securing the materials together for a more robust construction.

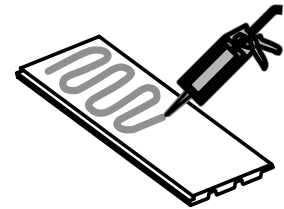


Step 3: Horizontal or Vertical Direction

Install the materials either horizontally or vertically as needed. Secure the pieces by screwing them onto the tongue or interlocking space, ensuring a sturdy and reliable fixing.

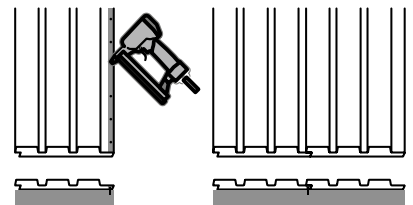


Step 4: Cutting with Circular Saw

Utilize a circular saw (preferably a ceramic blade) to cut the materials to the required length. This ensures precision and accuracy in tailoring the components to fit the construction specifications.

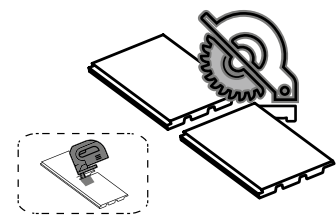

Step 5: Corner Assembly

For corners, combine the two grooves of the materials. This step ensures a seamless and tight fit at the corners, enhancing the overall structural integrity of the construction.

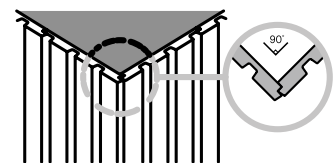


Note:

* Dimension Tolerance $\pm 3\%$

Tools and Materials:




Circular Saw



Measuring Tape



Wood Glue



Glue Gun



Living Environment
Pollution Reduction



Global Environmental
Pollution Reduction



Improvement of
Resource circulation

Handling Precautions

- Kindly Consider 10mm used for overlapping.
- Avoid direct sunlight and use within interior spaces, long exposure to sunlight could cause fading.
- The product can slightly vary in color based on the production lot number, we recommend installing with the same lot of products.
- There could be a slight variation in color from the samples seen in the brochure and the actual production.
- Recommend to keep in room temperature 24/48 hrs for acclimatization.
- Gently handle the edge of the product.
- Smooth and dust free.
- Only for indoor use.
- Water proof but prolonged exposure to moisture can do harm to the product.
- Cleaning only with a soft damp cloth without any chemicals or cleaning agents.